## (19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 1 July 2004 (01.07.2004)

PCT

## (10) International Publication Number WO 2004/055550 A1

(51) International Patent Classification7:

G01T 1/24

(21) International Application Number:

PCT/US2003/039432

(22) International Filing Date:

11 December 2003 (11.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/433,457

13 December 2002 (13.12.2002)

(71) Applicant (for all designated States except US): OY AJAT, LTD. [FI/US]; Tietotie 3, FIN-02150 (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SPARTIOTIS, Konstantinos [FI/FI]; Tietotie 3, FIN-02150 Espoo (FI). MAN-NISTO, Olli [FI/FI]; Tietotie 3, FIN-02150 Espoo (FI).

(74) Agent: PERNIA, Sherman, D.; 1110 Nasa Road One, Suite 450, Houston, TX 77058 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SWITCHING/DEPOLARIZING POWER SUPPLY FOR A RADIATION IMAGING DEVICE

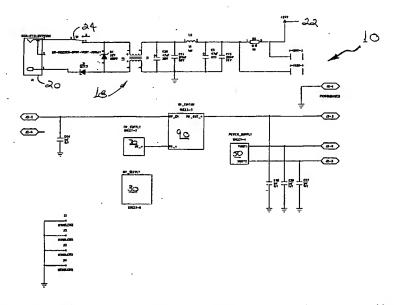

(57) Abstract: A high voltage switching power supply (10) for an X-ray/Gamma ray imaging camera provides high voltage switching and depolarization capabilities. The power supply includes a high voltage polarity switching and an image detector charge bleeding circuit (90) and is particularly useful with high energy radiation imaging cameras utilizing Cd-Te based detector substrates, especially substrates with blocked contacts, where charge accumulation in the detector material reduces imaging efficiency.